


No.	A	B	C	D	E	F	G
11	4.8	2.4	3.0	3.6	4.3	2.4	3.0
13	5.4	3.0	3.6	4.2	4.9	3.0	3.6
21	7.8	5.4	6.0	6.6	7.3	5.4	6.0
23	8.4	6.0	6.6	7.2	7.9	6.0	6.6
25	9.0	6.6	7.2	7.8	8.5	6.6	7.2
27	9.6	7.2	7.8	8.4	9.1	7.2	7.8
29	10.2	7.8	8.4	9.0	9.7	7.8	8.4
31	10.8	8.4	9.0	9.6	10.3	8.4	9.0
35	12.0	9.6	10.2	10.8	11.5	9.6	10.2
39	13.2	10.8	11.4	12.0	12.7	10.8	11.4
41	13.8	11.4	12.0	12.6	13.3	11.4	12.0
45	15.0	12.6	13.2	13.8	14.5	12.6	13.2
51	16.8	14.4	15.0	15.6	16.3	14.4	15.0
61	19.8	17.4	18.0	18.6	19.3	17.4	18.0
67	21.6	19.2	19.8	20.4	21.1	19.2	19.8
71	22.8	20.4	21.0	21.6	22.3	20.4	21.0

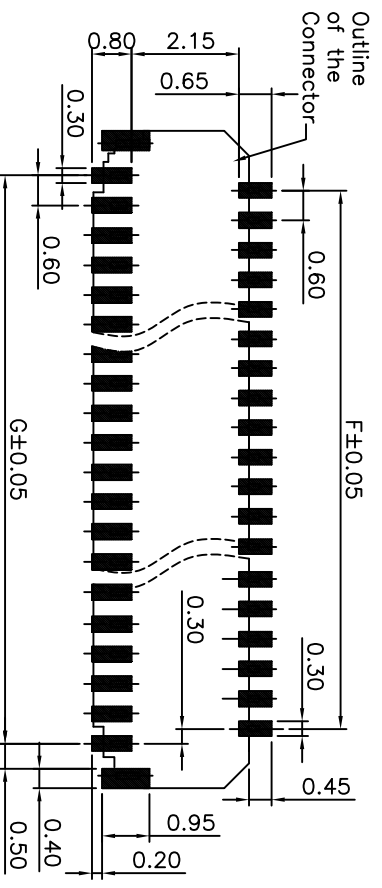


Recommended PCB Layout

Material And Finish
 Base Housing:LCP UL94V-0
 Hold Down Housing:LCP UL94V-0
 Contact:Phosphor Bronze, Gold 3u" Min
 Overall,Underplated Nickel Overall 50u" Min.
 Ground:Phosphor Bronze,Matte Tin 60u" Min
 Overall,Underplated Nickel Overall 50u" Min.




How To Order
 TFP-T1XXZH-BG1-ECF
 F:In Tape Reel
 C:Standard Type
 O:W/O Ear
 G1:Gold 3u" Plated
 B:Lower Contact
 ZH:W/ZIF&Horizontal
 SMT Type
 No. Of Positions
 1:0.30mm Pitch

1.3	Change Contact Type	<i>Shan Zhao</i>	23-Nov-2012				
1.2	Add The No.	Wei Feng	08-Dec-2010				
1.1	Modify Drawing	Ye Fei	19-Apr-2010				
1.0	RELEASED	HuangBingqiu	09-Apr-2009				
REV.	ECN, NDI	DR BY	DATE				
	1	2	3	4	5	6	7
<p>松嵐企業有限公司 TOWNES ENTERPRISE CO., LTD</p>				FINISH: MAT'L:			
X.X: ±0.20		Angula		TITLE : 0.30mm Pitch FPC W/ZIF		A4	
X.XX: ±0.10		±1.0°		Horizontal SMT Type Lower Contact			
X.XXX: ±0.05		X.XXX: ±0.03		Appo.: <i>Shan Zhao</i>		PART NO : TFP-T1XXZH-BG1-ECF	
UNIT: mm				CHKD: <i>Cel Wang</i>		DWG. NO.: RDA090409-001(N)	
SCALE: 1:1		SHEET: 1/3		DR: HuangBingqiu		REV.: 1.2	
						DATE: 09-Apr-2009	

Recommended FPC(Free)

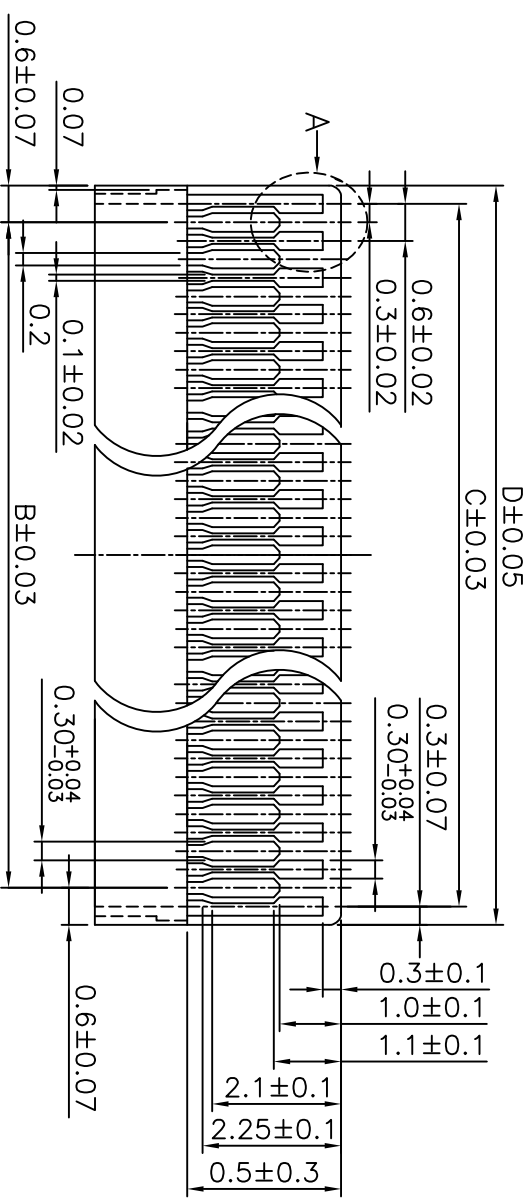

Dimension M Shall Be 0.5mm Min.
In Case The Length Of Stiffener
Is 3.5mm Max Due To FPC Design.

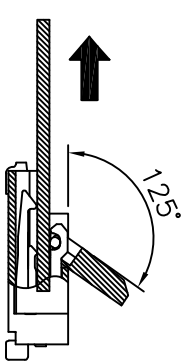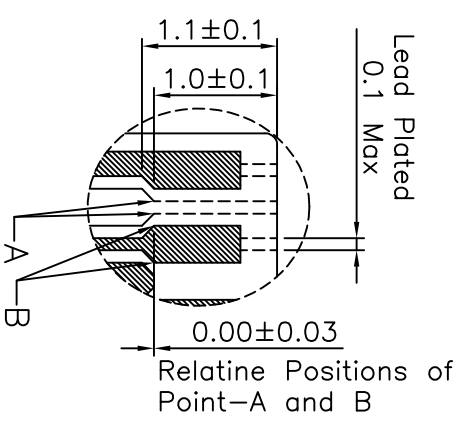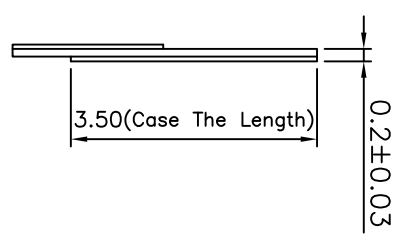

Instructions On Removing FPC

1.3																					
1.2																					
1.1																					
1.0	RELEASED	HuangBingqiu	09-Apr-2009	MAT'L:																	
REV.	ECN. NO.	DR BY	DATE																		






崧嵐企業有限公司
TOWNES ENTERPRISE CO., LTD

TITLE : 0.30mm Pitch FPC W/ZIF
Horizontal SMT Type Lower Contact

A4

X.X:	±0.20	Angula	
X.XX:	±0.10	±1.0°	
X.XXX:	±0.05	X.XXX: ±0.03	Appo.: <i>Shun Chao</i>
UNIT:	mm		CHKD.: <i>Cel Wang</i>
SCALE:	1:1	SHEET: 2/3	DR: HuangBingqiu
			PART NO.: TFP-T1XXZH-BG1-ECF
			DWG. NO.: RDA090409-001(NY)
			REV.: 1.0
			DATE: 09-Apr-2009

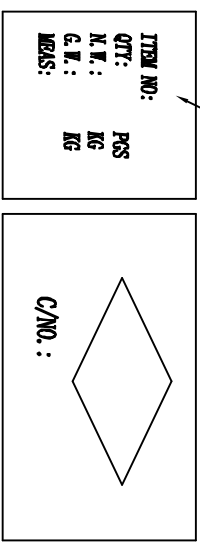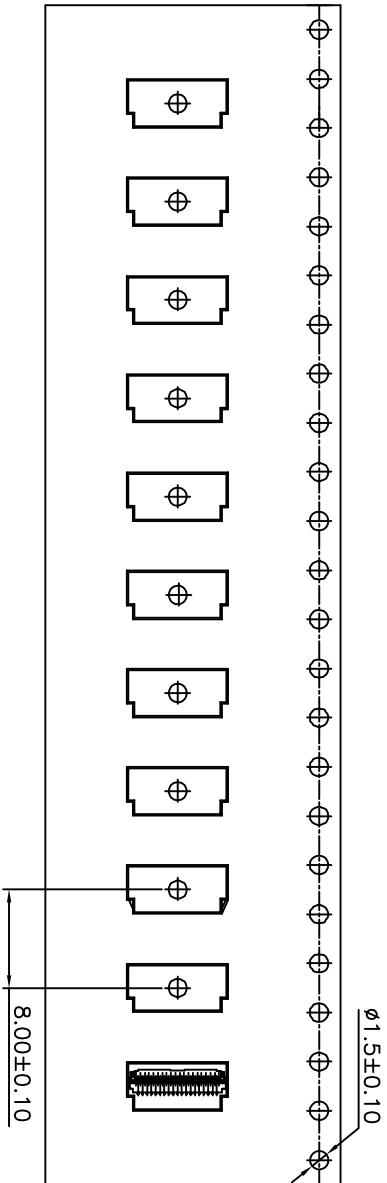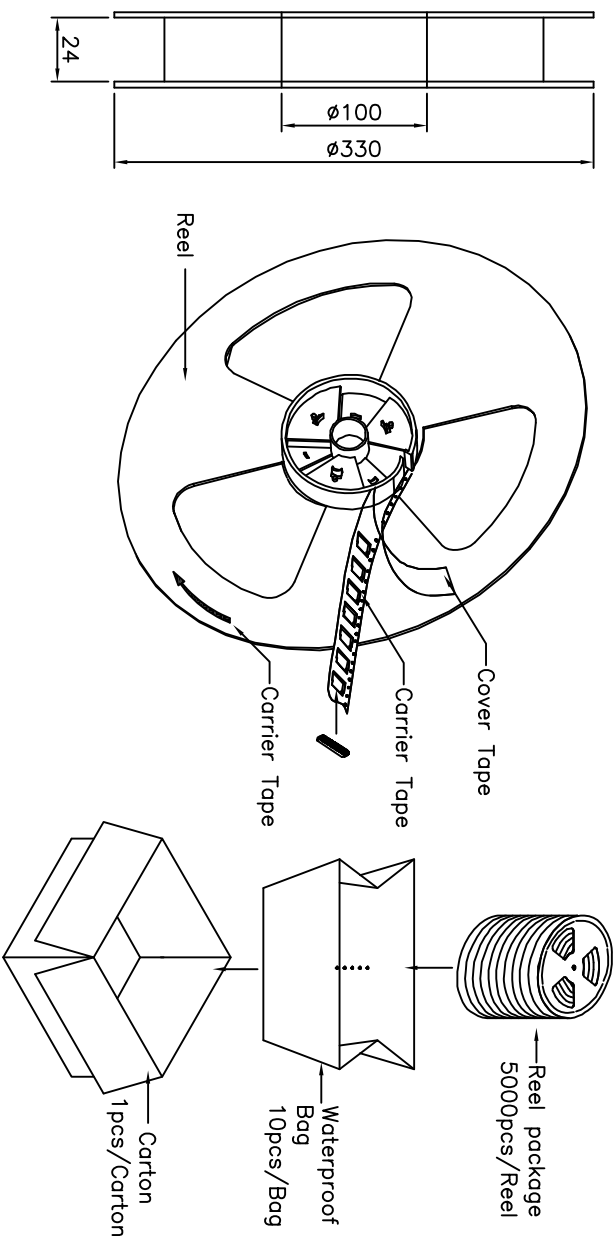

Note:

- 1. 未裝滿之零數箱須以緩衝材塞滿。
- 2. 搬運過程輕拿輕放。
- 3. 不可堆放過多，不可有重壓現象。
- 4. 在裝滿產品后，須空留袋前禾袋后15格以上，然後用紙膠布貼上。
- 5. 上帶貼下帶時須平整，且粘貼處有出現氣泡。

1.3						X.X: ±0.20	Angula	TITLE : 0.30mm Pitch FPC W/ZIF Horizontal SMT Type Lower Contact	A4
1.2						X.XX: ±0.10	±1.0°		
1.1						X.XXX: ±0.05	X.XXX: ±0.03	Appo.: <i>Shan Chao</i>	PART NO.: PK-TFP-T1XXZH-BG1-ECF
1.0	RELEASED	HuangBingqiu	09-Apr-2009	MAT'L:		UNIT: mm		CHKD.: <i>Cel Wang</i>	DWG. NO.: RDA090409-001(N)
REV.	ECN. NO.	DR BY	DATE			SCALE: 1:1	SHEET: 3/3	DR: HuangBingqiu	REV.: 1.0
1		2	3	4	5	6	7	8	



崧嵐企業有限公司
TOWNES ENTERPRISE CO., LTD

A B C D E A B C D E